

G5015-S SERIES




Product image



Product Description

- 50mm square x 15mm frame sizes
- Thermal protection type
- Rib type housing
- UL/cUL/cTUVus agency listed
- RoHS Compliance
- Weight 35g
- Operating Temperature -10°C~70°C
- Ball bearings structure
- Custom added-value options(i.e. special leadwires, connector installation and etc.)
- Options : Tachometer output signal or Locked rotor output signal

Outer plans and wind directions · Wind pressure curve

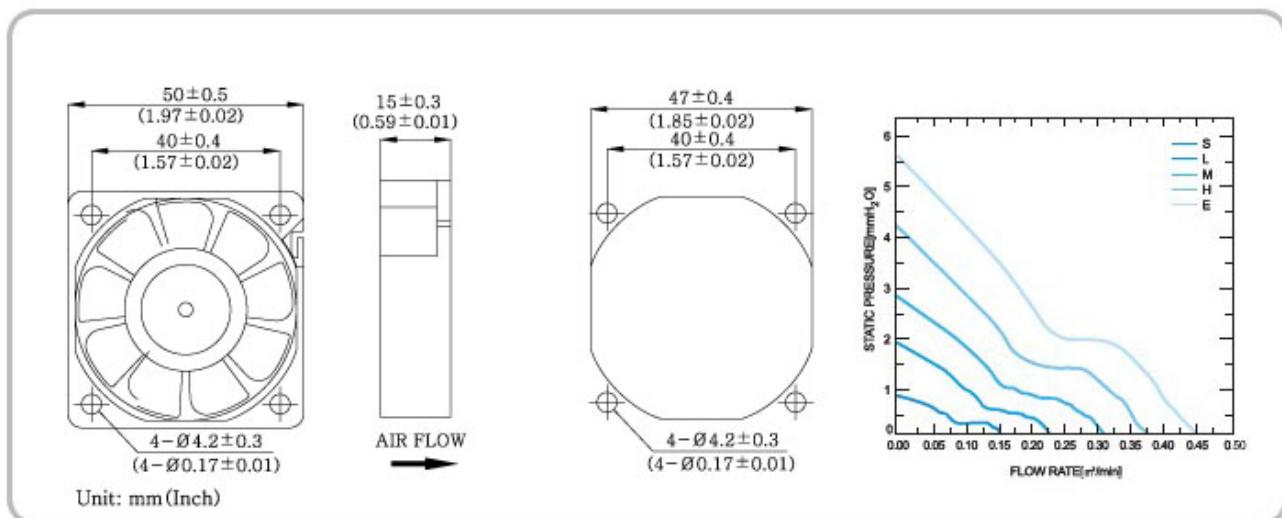

List of series models

G5015S05-S	5	150	0.8	2,500	4~6.5	0.15	5	0.92	0.04	20
G5015L05-S	5	220	1.1	3,500	4~6.5	0.22	8	1.94	0.08	22
G5015M05-S	5	300	1.5	4,500	4~6.5	0.31	11	2.86	0.11	24
G5015H05-S	5	400	2.0	5,500	4~6.5	0.37	13	4.29	0.17	29
G5015S12-S	12	80	1.0	2,500	7~14	0.15	5	0.92	0.04	20
G5015L12-S	12	130	1.6	3,500	7~14	0.22	8	1.94	0.08	22
G5015M12-S	12	200	2.4	4,500	7~14	0.31	11	2.86	0.11	24
G5015H12-S	12	280	3.4	5,500	7~14	0.37	13	4.29	0.17	29
G5015E12-S	12	400	4.8	6,500	7~14	0.44	16	5.71	0.22	34
G5015S24-S	24	70	1.7	2,500	14~28	0.15	5	0.92	0.04	20
G5015L24-S	24	100	2.4	3,500	14~28	0.22	8	1.94	0.08	22
G5015M24-S	24	140	3.4	4,500	14~28	0.31	11	2.86	0.11	24
G5015H24-S	24	180	4.3	5,500	14~28	0.37	13	4.29	0.17	29
G5015E24-S	24	250	6.0	6,500	14~28	0.44	16	5.71	0.22	34

※ Speed range at rated voltage is ±10% of rated speed.